
HYBRID STEPPING MOTOR

specifications:


MODEL	PHASE	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	DETENT TORQUE	ROTOR INERTIA	WEIGHT
		DEG/STEP	V	A	ohms	mH	N.m	N.cm	g.cm²	Kg
FL573P56-5606A	3	1.2	4	5.6	0.7	1.7	0.9	4.0Max	300	1.0

Wiring Diagram:

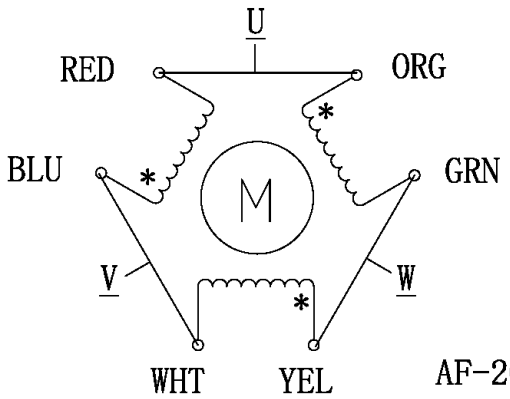

AF-200, 0.75mm² LENGTH:400mm

Dimension:

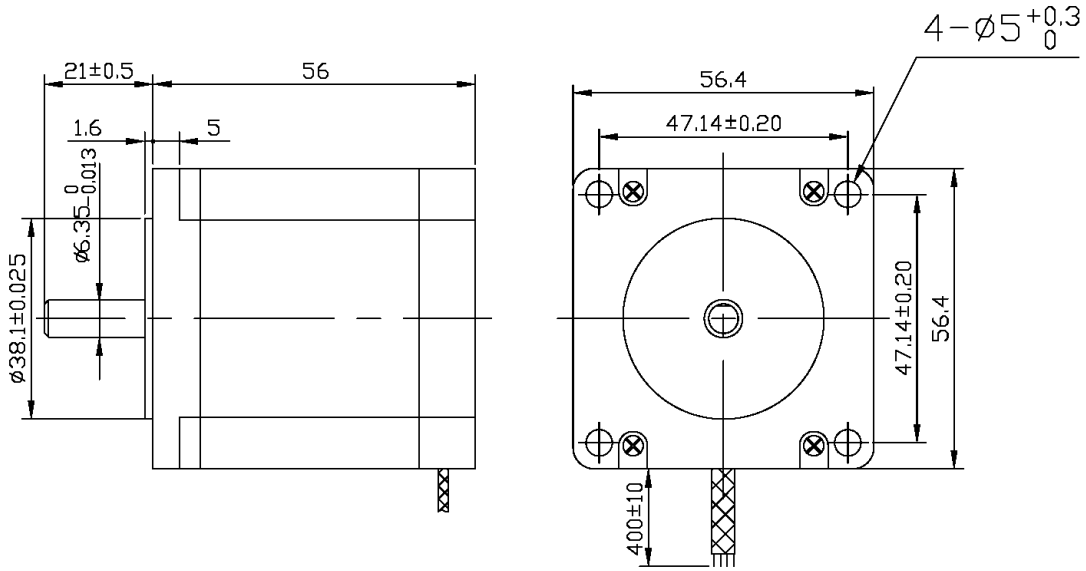

REV	ECN NO.	DESCRIPTION	DRN	APP'D	DATE

UNLESS OTHERWISE SPECIFIED TOLERANCES:
DECIMALS: ANGULAR:
.x ±0.5 ±0°30'
.xx ±0.25
.xxx ±0.1
UNIT: mm
DO NOT SCALE DRAWING

MATERIAL

THIRD ANGLE PROJECTION

DESIGN	DATE	P/N.
CHECK		TITLE SPECIFICATIONS
APPD		USED ON 3S57Q-04056
		DWG NO. FX3.162. REV
SCALE		Kinco
SHEET OF		